


Fastener type H

Advantages:

- quick mounting
- high distance balance
- installable in all positions
- fire-resistant

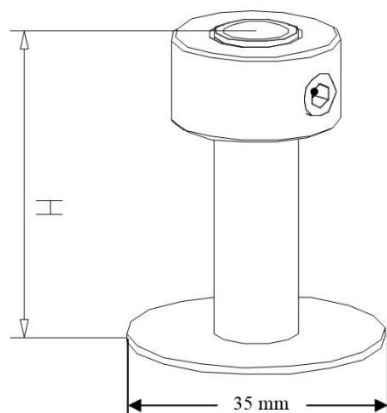

Technical Data

- Fastener for underconstruction, without rubber.
- For 8mm welding studs.
- Maximum permissible load = 250 N / fastener

Dimensions:

H = 25, 40, 100, 150

other dimensions on request



Material:

- Galvanized steel (standard)
- Stainless steel (1.4301, 1.4571)