



## Rubber Dampers type GP-AZ/ GP-BZ / GP-CZ

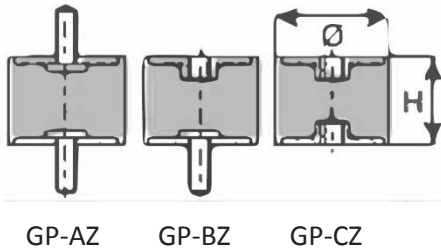

Dimensions					Compression		
Diameter D (mm)	Height H (mm)	Thread d (mm)	Long (mm)	Depth t (mm)	Spring rate c[N/mm]	Permissible load F <sub>max</sub> [N]	Optimum load F <sub>opt</sub> [N]
6	7	M3	6	3	17	18	9
8	8	M3	8	3	28	35	18
10	10	M4	10	4	35	50	30
15	15	M4	13	4	53	120	60
20	15	M6	18	5	116	270	140
	20				71	220	120
	25				49	190	100
25	15	M6	18	5	220	500	270
	20				129	400	210
	25				88	340	180
30	30	M8	23	7	66	300	160
	20				216	660	350
	30				106	490	260
40	40	M8	23	7	67	410	220
	20				232	1060	570
	30				141	860	460
50	60	M10	28	8	75	690	370
	20				1020	3120	1660
	30				440	2020	1080
	40				259	1580	840
60	45	M10	28	8	211	1450	770
	50				177	1350	720
	40				432	2641	1409
70	50	M10	28	8	289	2209	1178
	45				539	3710	1980
75	40	M12	37	10	832	5090	2710
	55				453	3810	2030
100	40	M16	41	14	2039	12470	6650
	55				1265	9670	5160

- 3 Versions in various dimensions, types of rubber and rubber toughness

- Hardness: 40°,60° shore  
Other hardnesses on request.

- Table contains only a very small extract (about 2%) from our delivery program, with different dimensions or requirements, please contact us.